


# MIP Range

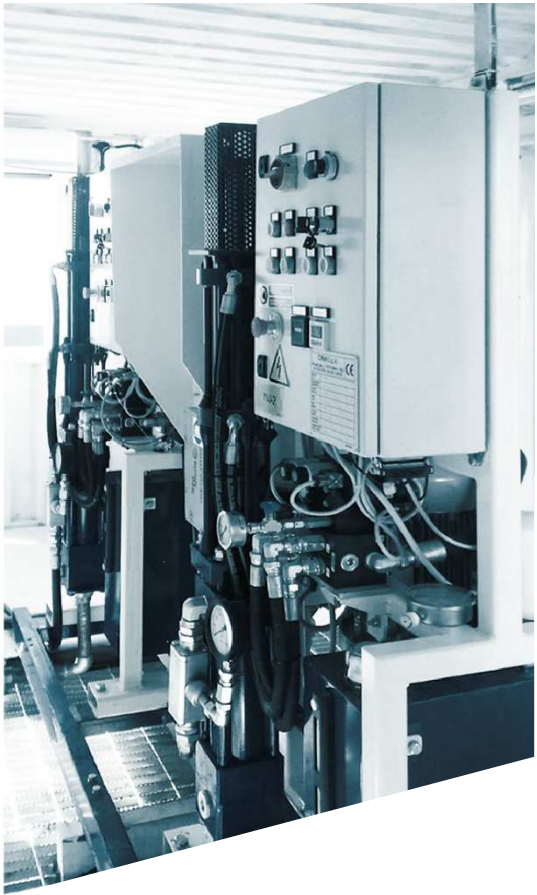

MIP Range						
TECHNICAL FEATURES						
Size			MIP3	MIP5	MIP8	MIP10
Power supply	Diesel	–	✓	✓	✓	✓
	Electric	–	✓	✓	✓	✓
Pump max pressure	Diesel	Bar   Mpa	100   10	100   10	80   8	–
		PSI	1450	1450	1160	–
	Electric	Bar   Mpa	100   10	100   10	80   8	100   10
		PSI	1450	1450	1160	1450
Pump max flow rate	Diesel	l/min	36	200	212	–
		gpm	10	53	56	–
	Electric	l/min	36	200	212	63
		gpm	10	53	56	17
Max installed power	Diesel	kW	33	45	40 ÷ 61	–
		hp	45	61	53 ÷ 83	–
	Electric	kW	33	25	40 ÷ 61	78
		hp	45	34	53 ÷ 83	106
Max volumetric capacity	Diesel	l	950	350	350	–
		gal	92	92	92	–
	Electric	l	950	350	350	360
		gal	92	92	92	95
Holding tank load capacity	Diesel	l	500	500 ÷ 1000	2000	–
		gal	132	132	528	–
	Electric	l	500	500	2000	1000
		gal	132	132	528	264
Production capacity	Diesel	m <sup>3</sup> /h	5	5	8	–
		gph	1320	1320	2110	–
	Electric	m <sup>3</sup> /h	5	5	8	10
		gph	1320	1320	2110	2642
Weight	Diesel	kg	1600	2770	4500	–
		lb	3530	6100	9900	–
	Electric	kg	1600	1900	4500	6900
		lb	3530	4200	9900	15212
Overall dimensions	Diesel	m	1,4x2,45x1,9	2x2,7x2,2	2,45x3x2,6	–
		ft   in	4'7"x8'x6'3"	6'7"x8'10"x7'3"	8'x9'10"x8'6"	–
	Electric	m	1,4x2,45x1,9	2,45x1,4x2	2,45x3x2,6	2,45x6,05x2,58
		ft   in	4'7"x8'x6'3"	8'x4'7"x6'7"	8'x9'10"x8'6"	8'x6'10"x8'6"

✓ Available

Other equipment available on request

All technical data are purely indicative  
and subject to change without notice